CONCRETE LOOK

# NOMINEE™ COLORBODY™ PORCELAIN PAVERS










Norristown, PA 610.539.1960

www.norristownbrick.com

An Outdoor Living Supply Company

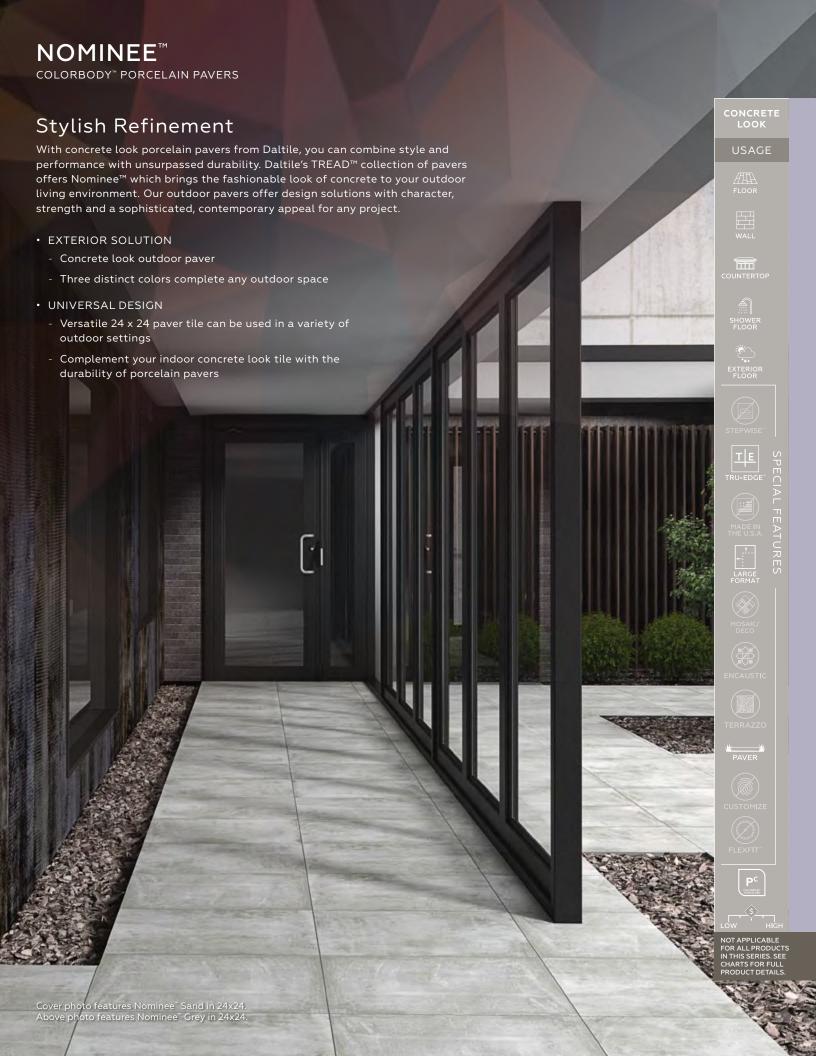






FINISHES: MATTE

## COLOR PALETTE







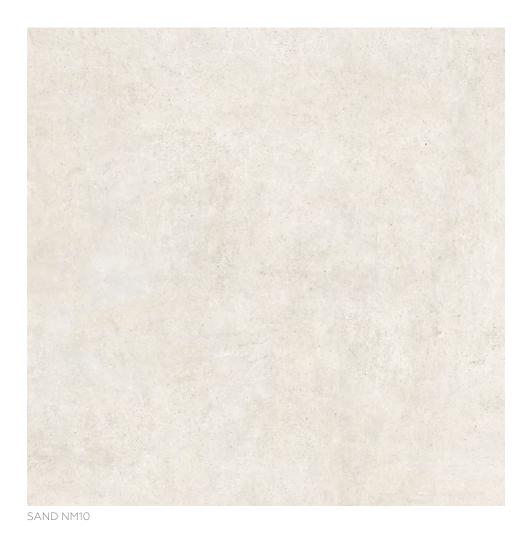



TAUPE NM11



GREY NM12

















WATERPROOF

SCRATCH-RESISTANT

# NOMINEE™

### COLORBODY™ PORCELAIN PAVERS

### SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton
24 x 24 Paver Tile	(23-1/2" x 23-1/2") (59.70 cm x 59.70 cm)	13/16" (2cm)	7.67	2

#### **APPLICATIONS**

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	<b>✓</b>
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	<b>✓</b>
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of  $\geq$ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest $^{"}$ , visit daltile.com/DCOF.

#### APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

#### INSTALLATION

The gaps between the slabs should be chosen depending on the overall desired aesthetic.	
Gaps of at least 3/16" (4 mm) should be left between slabs, using spacers to set the correct width. Joint may be left empty or filled with fine sand, polymeric sand specifically formulated for porcelain tile or small, clean aggregate, depending on the joint width and desired aesthetic.	
The gaps between the slabs should be chosen depending on the overall desired aesthetic.	
Slabs must be laid with open joints of variable width of no less than 3/16" (5 mm).	
Pedestal contains correct tile spacers for application.	

### SHADE VARIATION

NM10, NM11, NM12



Medium (V2)

### PERFORMANCE CHARACTERISTICS

	ASTM#	Paver Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 1000 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: daltile.com/information/TestResults.

### NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.







7834 C.F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.

